Replacement Hopper for the Six-Row Seeder
Instructions

7030 E 46th Avenue Dr, Denver, CO 80216, United States
support@hensleyseeds.com | hensleyseeds.com

Materials Included


(1) Replacement Hopper
(3) #4 x ¼" Torx screws
(3) #4 Flat washers

Additional Tools Needed

- T10 Torx screwdriver

INSTRUCTIONS

1. Remove the hardware securing the old hopper using a T10 Torx screwdriver.
   Note: *If you have a first generation Six-Row Seeder, the hopper's hardware will include three of each: screws, springs, and plastic bushings, which can be discarded or recycled. This tool Replacement Hopper is designed to be compatible with both the Second Edition Six-Row Seeder and the First Edition model, but must be installed with its own, different hardware (included).*
2. Place the brush assembly inside the hopper before positioning it snugly against the seed shaft (see #2 below).
3. Use the Torx screws and flat washers provided to secure the new hopper in place (see #3 below).

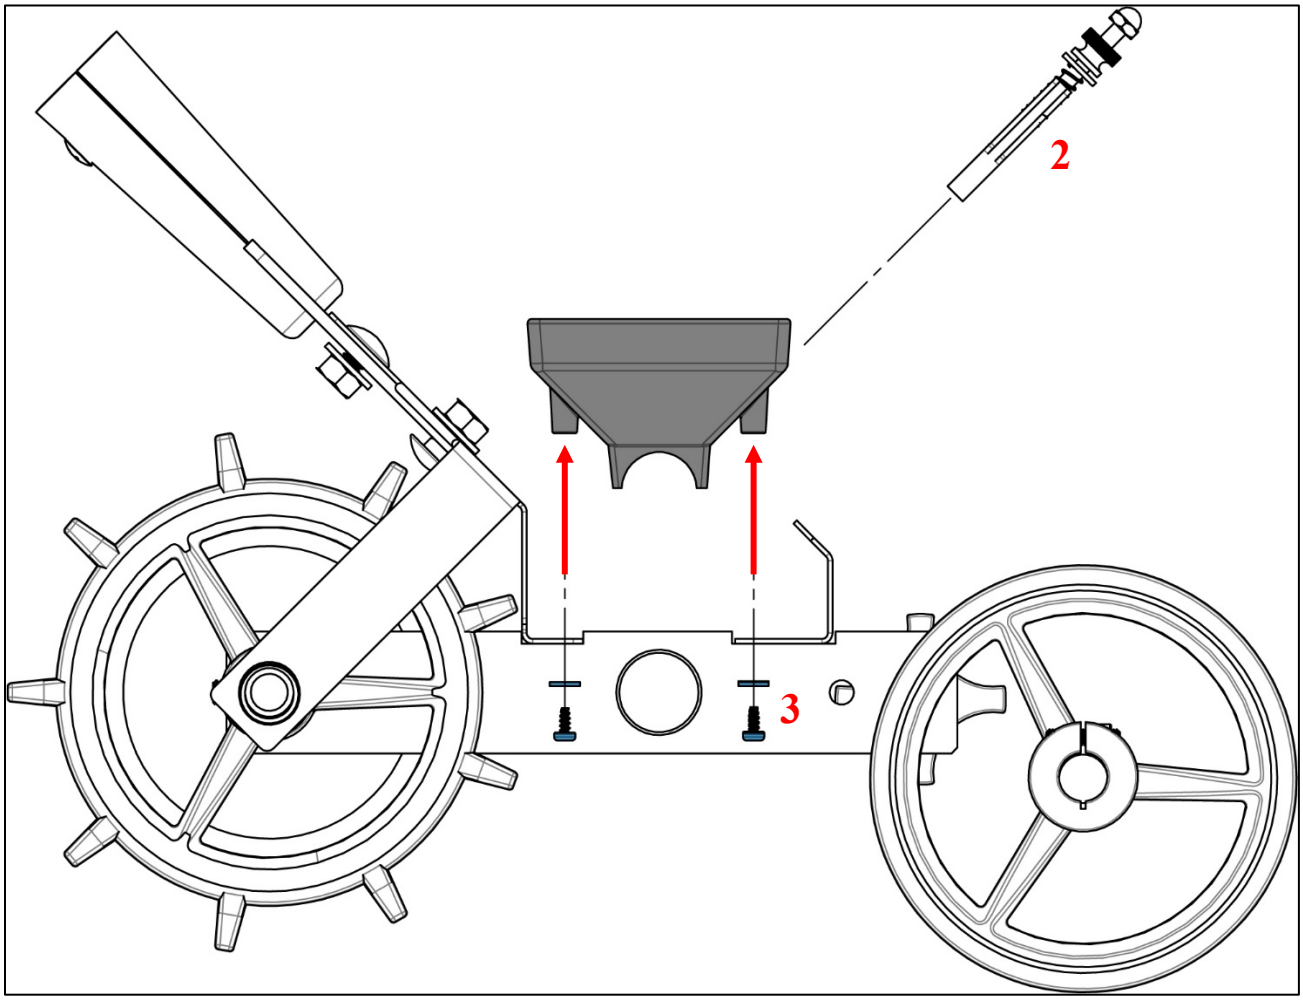

10.14.2021 | JG, ms

Copyright © 2021 Hensley's Seed Co. All rights reserved.